



## TOOLS REQUIRED

- Crimping tool and connectors, or solder gun, solder, and heat shrink • Tape • Wire cutter • Zip ties • Multimeter

[www.metraonline.com](http://www.metraonline.com)

For **Dash Disassembly Instructions**, refer to [metraonline.com](http://metraonline.com). Enter the year, make, and model of the vehicle in the **Vehicle Fit Guide** for **Radio Install Kits**.



## Radio Status Control Harness

### Fits Select Hyundai/Kia Models **2011-2020**

Visit [AxxessInterfaces.com](http://AxxessInterfaces.com) for more detailed information about the product and up-to-date vehicle specific applications

## FEATURES

- AXRSC radio status control interface required (sold separately)
- Designed for non-amplified vehicles
- Designed for select aftermarket radios\*
- Provides accessory power (12-volt 10-amp)
- Retains R.A.P. (Retained Accessory Power)
- Provides NAV outputs (parking brake, reverse, and speed sense)
- Retains factory backup camera (AXCSD-6V required, sold separately)
- Allows a visual of HVAC and gauges on the aftermarket radio screen\*
- Retains audio controls on the steering wheel
- Works in both single and dual-zone vehicles
- Allows the retention and adjustment of the OE personalization settings
- Plug-n-play installation

\*Features retained are dependent on the vehicle application. Refer to vehicle-specific instructions for details.

**NOTE:** If retaining the amplified system the AXSP-HK is needed (sold separately)

## TABLE OF CONTENTS

Interface Installation:	
LD-OBDD2-2PIN & LD-AXRSC-7304 .....	2-4
Amplified.....	2
Non-Amplified .....	3
NAV & NON-NAV.....	4
AXRSC Configuration .....	5

## COMPONENTS

- LD-OBDD2-2PIN • LD-AXRSC-7304


## WIRING & ANTENNA CONNECTIONS

Included with Kit: Wiring Harness  
Sold separately: 40-EU55, GPS Antenna Adapter  
**NOTE:** Universal radio harness included.  
There are many Plug-N-Play harnesses available.  
Please see [Axxessinterface.com](http://Axxessinterface.com) for more details.

**ATTENTION:** With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections, especially the air bag indicator lights, are plugged in before reconnecting the battery or cycling the ignition to test this product.  
**NOTE:** Refer also to the instructions included with the aftermarket accessory before installing this device.


# INTERFACE INSTALLATION FOR AMPLIFIED MODELS

## AMPLIFIED

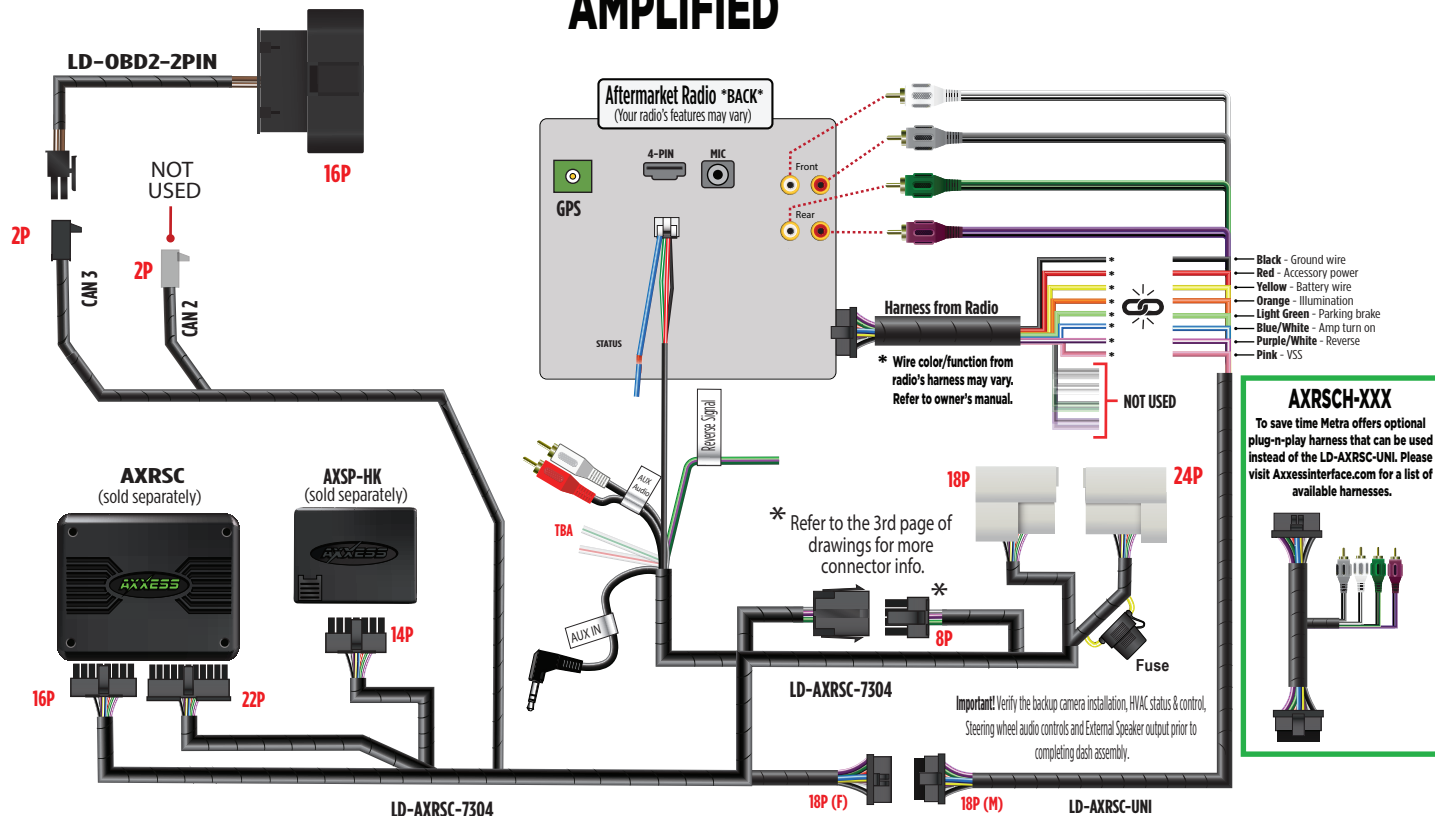


# INTERFACE INSTALLATION FOR NON-AMPLIFIED MODELS

## NON-AMPLIFIED

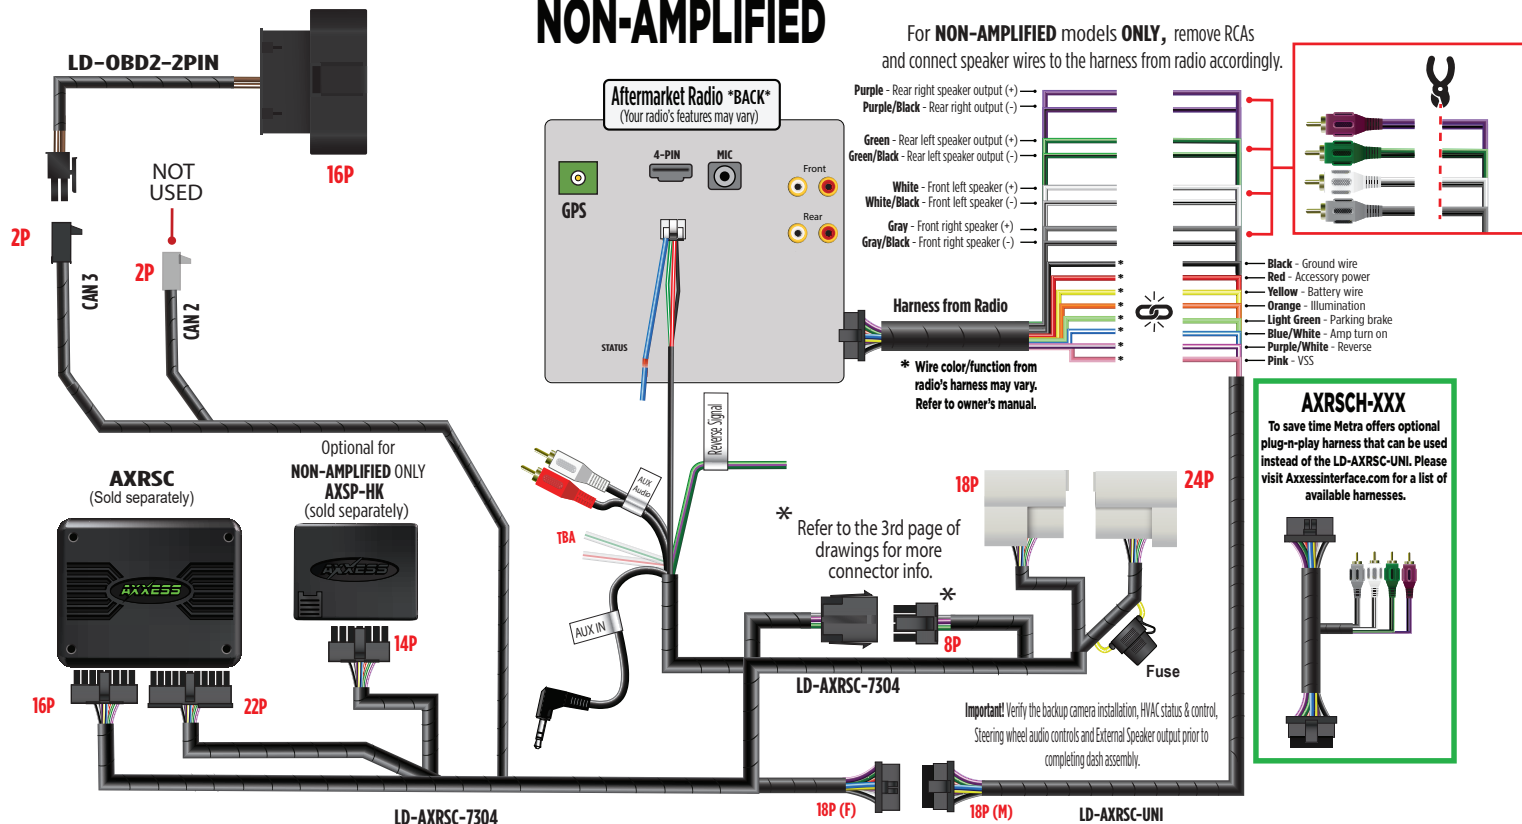


## INTERFACE INSTALLATION *Cont.*

For 2015 Models

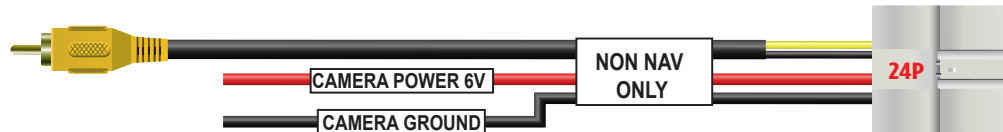

For 2011-14 Models



**AXCSD-6V**  
(sold separately)




**Blue/White** - Reverse trigger  
**Black** - Chassis ground  
**Blue/Red** - Camera power

## AXXESS UPDATER PROGRAM: AXRSC CONFIGURATION


### AXRSC Configuration

1. Open the Axxess Updater program
2. Select “AXRSC Config”. (Figure A)
3. Enter **Year, Make, and Model** of vehicle you are working on. (Figure B)
4. Select **Radio Type**. (Figure B)
5. Connect the **AXRSC interface** to your computer
6. Select “**Write Config**” (Figure B), and wait for confirmation of “**Configuration was written successfully**” to show on the screen. (Figure C)
7. Click **OK**, disconnect the **AXRSC interface** and install in vehicle.


**NOTE:** Plugging in the interface and selecting “**Read Config**” will show what the **AXRSC interface** is programmed as.

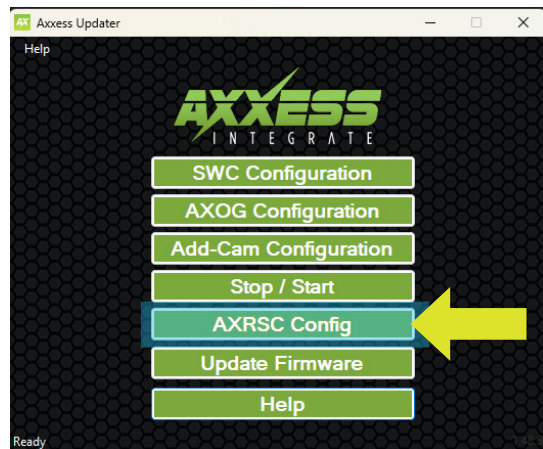

(Figure A)

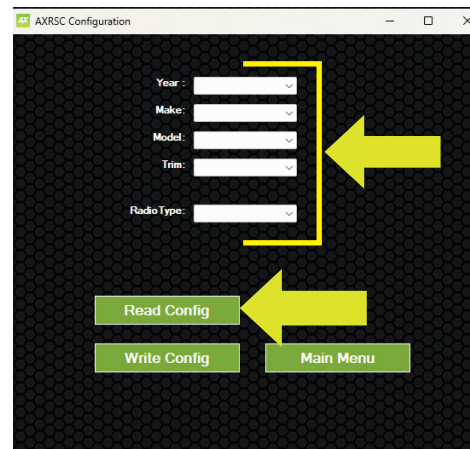

(Figure B)

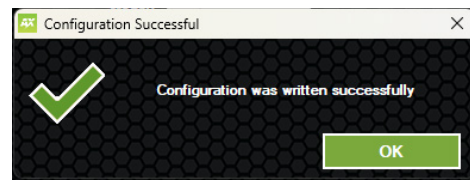

(Figure C)







# AXRSCH-HK1

INSTALLATION INSTRUCTIONS

Having difficulties? We're here to help.



Contact our Tech Support line at:

**386-257-1187**



Or via email at:

[techsupport@metra-autosound.com](mailto:techsupport@metra-autosound.com)

## Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 5:00 PM

Sunday: 10:00 AM - 4:00 PM



**Metra recommends MECP  
certified technicians**