



For Dash Disassembly Instructions, refer to [metraonline.com](http://metraonline.com). Enter the year, make, and model of the vehicle in the Vehicle Fit Guide for Radio Install kits.

[www.MetraOnline.com](http://www.MetraOnline.com)



## Radio Status Control Harness

### Fits Select GM Models 2010-2017

Visit [AxxessInterfaces.com](http://AxxessInterfaces.com) for more detailed information about the product and up-to-date vehicle specific applications.

#### FEATURES

- AXRSC radio status control interface required (sold separately)
- Designed for amplified or non-amplified vehicles
- Designed for select aftermarket radios\*
- Allows for the retention and adjustment of the factory personalization menu through the aftermarket radio screen\*
- Retains audio controls on the steering wheel
- Provides a visual view of HVAC and gauges on the aftermarket radio screen\* (cannot be adjusted via the screen)
- Provides accessory power (12-volt 10-amp)
- Provides NAV outputs (parking brake, reverse, and speed sense)
- Works in both single and dual-zone vehicles
- Retains safety chimes through an included off-board speaker
- Plug-n-play installation

\*Features retained are dependent on the vehicle application. Refer to vehicle-specific instructions for details.

#### TABLE OF CONTENTS

Interface Installation	
Amplified.....	2
Non-amplified.....	3
AXRSC Configuration .....	4

#### TOOLS REQUIRED

- Crimping tool and connectors, or solder gun, solder, and heat shrink
- Tape
- Wire cutter
- Zip ties
- Multimeter

#### WIRING & ANTENNA CONNECTIONS

Sold separately: 40-EU55, GPS Antenna Adapter

#### COMPONENTS

- LD-3010-PIO
- LD-AX-SPK

**NOTE:** Universal radio harness included.


There are many Plug-N-Play harnesses available. Please see [Axxessinterface.com](http://Axxessinterface.com) for more details.

**ATTENTION:** With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections are secure before cycling the ignition to test this product.

**NOTE:** Refer to the instructions included with the aftermarket radio.

# AXXESS WIRING INSTALLATION: AMPLIFIED


## AMPLIFIED

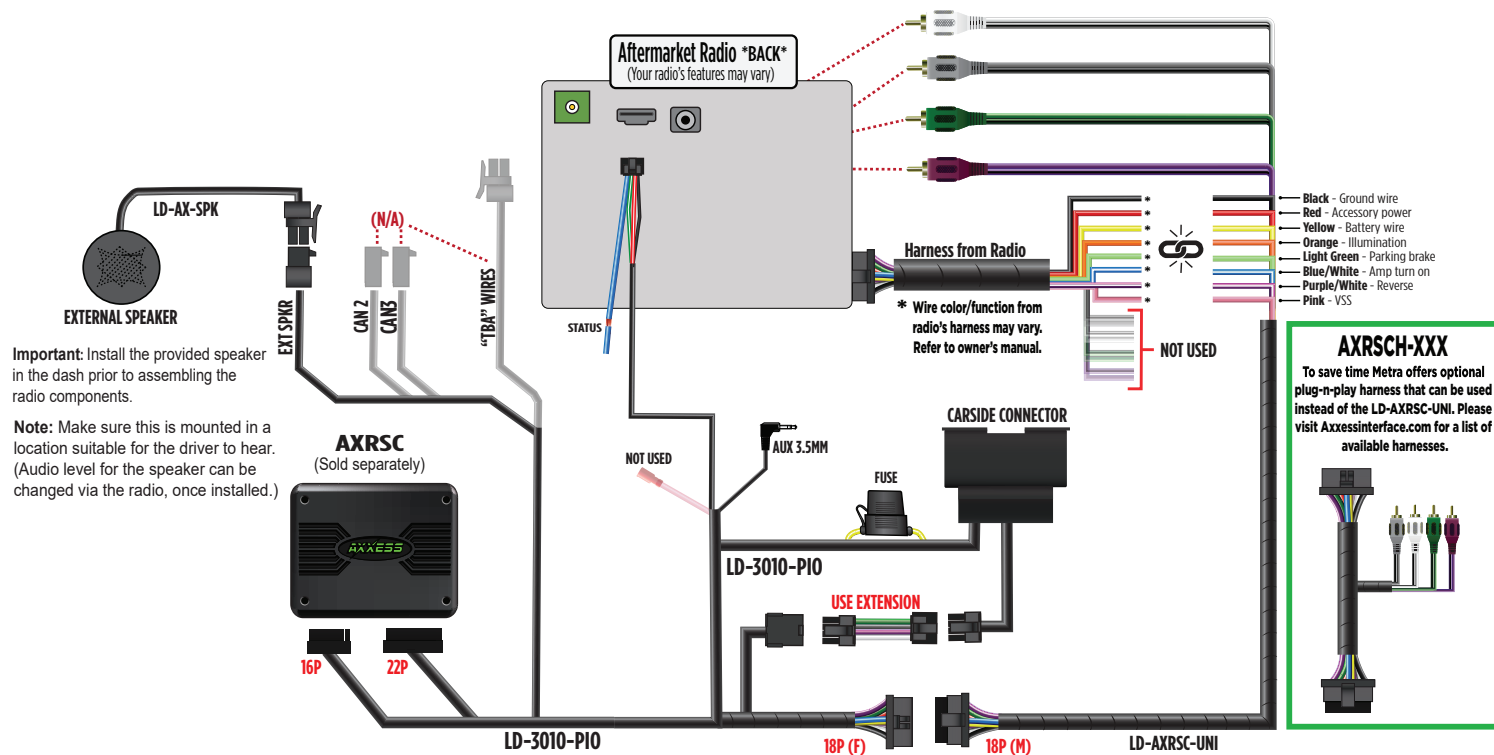

# AXXESS WIRING INSTALLATION: NON-AMPLIFIED

## NON-AMPLIFIED

For **NON-AMPLIFIED** models **ONLY**, remove RCAs and connect speaker wires to the harness from radio accordingly.

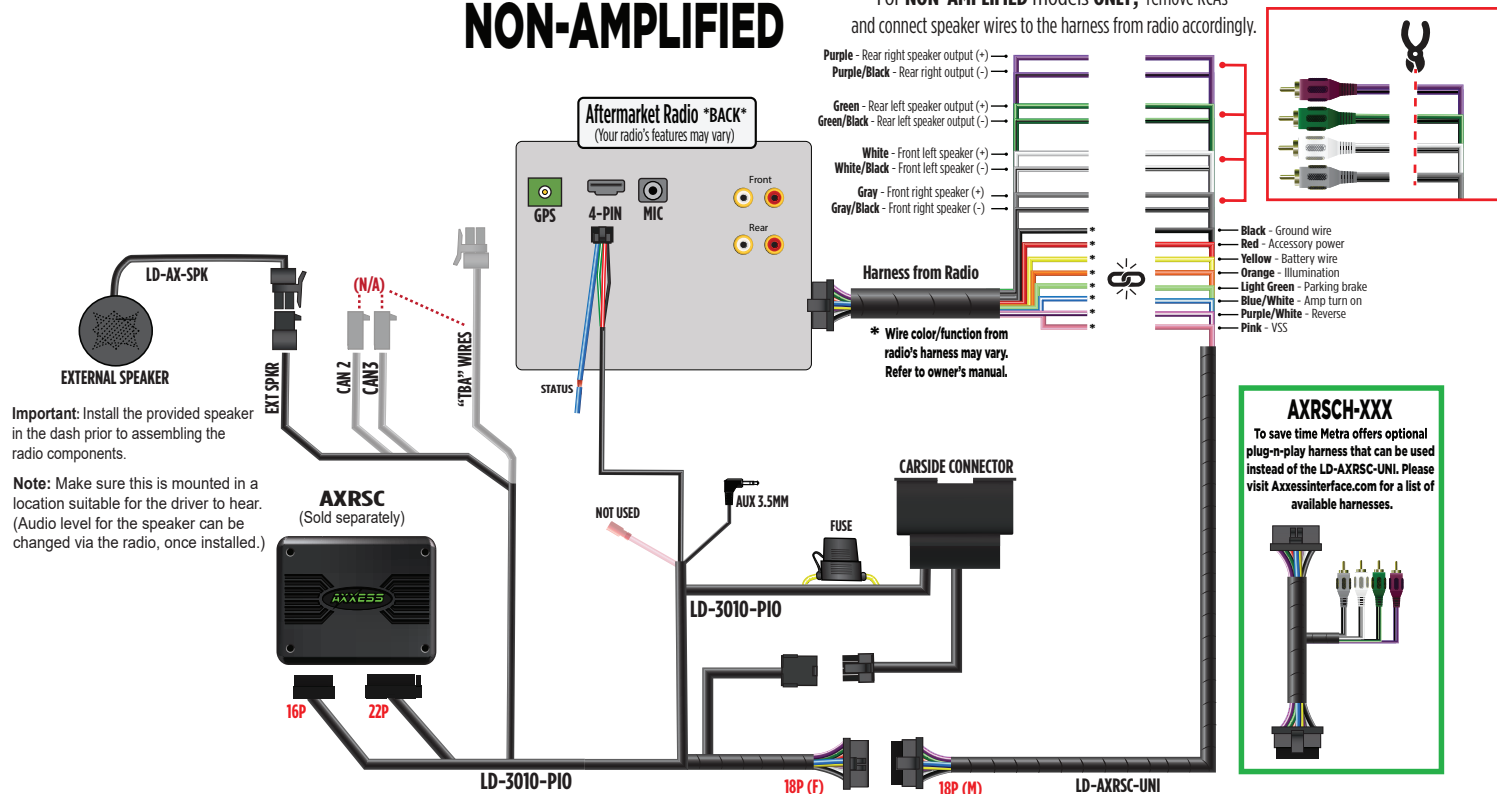



# AXRSCH-GM44


INSTALLATION INSTRUCTIONS



## AXXESS UPDATER PROGRAM: AXRSC CONFIGURATION

### AXRSC Configuration


1. Open the Axxess Updater program
2. Select **"AXRSC Config"**. (Figure A)
3. Enter **Year, Make, and Model** of vehicle you are working on. (Figure B)
4. Select **Radio Type**. (Figure B)

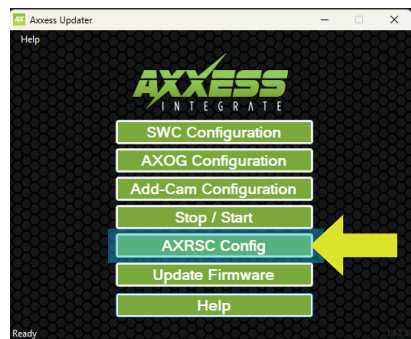


(Figure A)

5. Connect the **AXRSC** interface to your computer
6. Select **"Write Config"** (Figure B), and wait for confirmation of **"Configuration was written successfully"** to show on the screen. (Figure C)
7. Click **OK**, disconnect AXRSC interface and install in vehicle. (Figure C)

**NOTE:** Plugging in the interface and selecting **"Read Config"** will read what the **AXRSC interface** is programmed as.

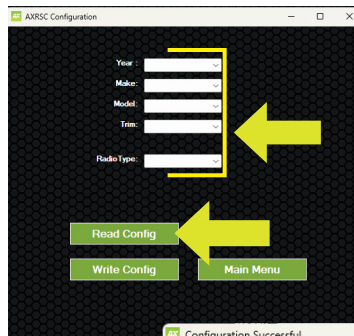

(Figure B)

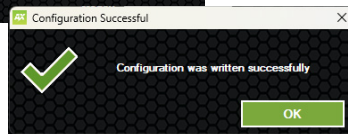

(Figure C)

Having difficulties? We're here to help.



Contact our Tech Support line at:

**386-257-1187**



Or via email at:

[techsupport@metra-autosound.com](mailto:techsupport@metra-autosound.com)

### Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 5:00 PM

Sunday: 10:00 AM - 4:00 PM



**Metra recommends MECP  
certified technicians**