



Part Components

A) Headlights



B) Connect RGB Controller



C) Remote and Hardware



Fits **Jeep Wrangler 1997-UP*** and **Jeep Gladiator 2020-UP***

7" HEADLIGHTS WITH HEISE CONNECT RGB CONTROLLER

ITEM NUMBER: JP-702RGB

Product Features

- RGB LED halos
- Turn signal function
- App and RF remote controlled

TABLE OF CONTENTS

BEFORE YOU START.....	2
SPECIFICATIONS.....	2
WRANGLER JK HEADLIGHT REMOVAL.....	3
WRANGLER JL & JT HEADLIGHT REMOVAL.....	4
INSTALLATION	5
DIAGRAM.....	6

TOOLS REQUIRED

Wrangler JK

- Plastic pry tool
- T-15 Torx® driver

Wrangler JL & JT

- Plastic pry tool
- 10mm driver

General

- Phillips screw driver
- Crimper
- Stripper
- Pick tool
- Side cutter
- Electrical tape
- Cable ties

Attention! When testing the aftermarket equipment, ensure that all factory equipment is connected before cycling the key to ignition.

BEFORE YOU START

Before you start, make sure you have everything that is needed for the installation. These models require additional parts.*

2010-2018 Wrangler JK <i>-Any trim</i>	2010-2018 Wrangler JK <i>-Hard Rock Rubicon X -10th Anniversary Edition</i>	2018-Up Wrangler JL <i>-Any trim</i> 2020-Up Gladiator <i>-Any trim</i>	2018-Up Wrangler JL <i>-Sport</i> 2020-Up Gladiator <i>-Sport</i>	2018-Up Wrangler JL <i>-Rubicon</i> <i>-Sierra</i> 2020-Up Gladiator <i>-Rubicon</i> <i>-Sierra</i>
<ul style="list-style-type: none">Requires use of <u>JP-H4H13DE</u> decoder and adapter (sold separately)<u>JP-TSH2</u> (optional) DRL adapter	<ul style="list-style-type: none"><u>JP-TSH2</u> (optional) DRL adapter	<ul style="list-style-type: none"><u>JP-TSH1</u> (optional) DRL adapterRequires use of <u>JP-JLB7</u> headlight adapter (sold separately)	<ul style="list-style-type: none"><u>JP-TSH1</u> (optional) DRL adapterRequires use of <u>JP-JLB7</u> headlight adapter (sold separately)	<ul style="list-style-type: none"><u>JP-TSH1</u> (optional) DRL adapterRequires use of <u>JP-JLB7</u> headlight adapter (sold separately)

*Please visit MetraOnline.com for the latest application details.

GENERAL SPECIFICATIONS

7" HEADLIGHTS

- 50 watts each
- Lumen: 3600lm (high beam), 1800lm (low beam)
- Color Temperature: 6500KK
- Material: Die-cast aluminum alloy housing
- Lens: Polycarbonate
- IP rating: IP67
- Operating Voltage: 12V
- H4 to H13 connectors included
- Canbus decoders included

HEISE CONNECT RGB CONTROLLER

- 24 color changing patterns
- Turn signal halo function
- Music sync function
- App controlled (HEISE CONNECT app)
- RF card remote included

Connect controller app



WRANGLER JK HEADLIGHT REMOVAL

1. Open hood and remove the (6) push pin clips across the top of the grille using a plastic pry tool. (Figure A)
2. Gently lean grille forward to access panel clips at rear bottom of grille. Using a panel pry tool, release grille from clips. (Figure B)
3. Disconnect the left and right turning signal. (Figure C)
4. Remove the (4) T-15 Torx® screws from each headlight retaining ring. New headlights will be secured in place with the factory hardware. (Figure D)
5. Unplug and remove the headlight.
6. Trim off keyway from the factory mounting plate. (Figure E)
7. Connect the included H4 adapter and Canbus decoder to the vehicle harness for each headlight.

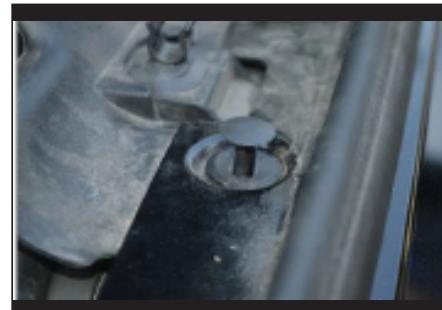


Figure A



Figure B



Figure C



Figure D



Figure E

Continue to installation on page 5.

WRANGLER JL AND GLADIATOR HEADLIGHT REMOVAL

1. Open hood and remove the (6) push pin clips across the top of the grille using a plastic pry tool. (Figure A)
2. Pressure clips will be the only things holding the grille to the Jeep at this point. Pull from the bottom corner of the grille to release the clips and remove grille. (Figure B)
3. Remove the (3) 10mm bolts from the headlight assembly.
4. Unplug and remove the headlight. Install JP-JLB7 headlight brackets (not included), and plug the H4 to OE adapter into the factory headlight harness (included with JP-JLB7).

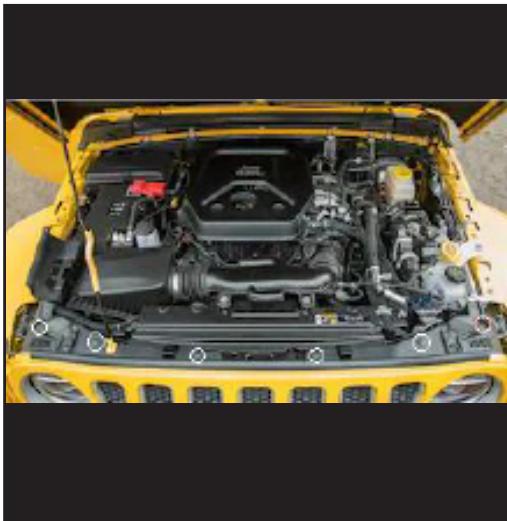


Figure A



Figure B

Continue to installation on page 5.

INSTALLATION

Controller

1. Locate a suitable location to mount the Connect RGB controller inside the engine bay.
2. Connect the **BLACK** wire from the controller to chassis ground. There are several factory ground points along the fire wall and sides of the engine bay.
3. Connect the **RED** wire from the controller to a switched +12VDC source. Adding a 10 amp in-line fuse is recommended.
4. A) Using the JP-TSH1 (JL/JT) / JP-TSH2 (JK) (sold separately), connect the controller turn signal wires following the t-harness instructions and diagram on page 7.
OR
B) Using a digital multi-meter, locate the +12VDC wire for the left and right turn signals located at the lights. Note the wire colors. Connect the **GREEN** wire from the controller to the left (driver) turn signal wire, and connect the **YELLOW** wire to the right (passenger) turn signal wire.

JK



JL / JT



INSTALLATION


Controller to lights

5. Run the left channel 4 pin cable to the driver side headlight location, making sure to avoid hot surfaces and pinch points. Secure the cables approximately every six inches.
6. Run the right channel 4 pin cable to the passenger side headlight location, making sure to avoid hot surfaces and pinch points. Secure the cables approximately every six inches

Connect and test

7. Connect the 4 pin cable to the new headlight and plug the H4 connector into the vehicle harness or previously installed adapter. Mount headlight into vehicle, then repeat on the other side.
8. Download app (QR code on page 2) for smart phone control, and refer to Heise Connect controller instructions for setup. Controller can also be controlled from RF remote (included).
9. Test the low beam, high beam, turn signals, and RGB functions.
10. Preform any needed adjustments on the new headlights. The adjustment is to properly aim the lights to generate the correct beam pattern. Details on the procedure can be found in the vehicle service manual. There is also support videos on MetraOnline.com.
11. Reinstall any removed panels.

DIAGRAM

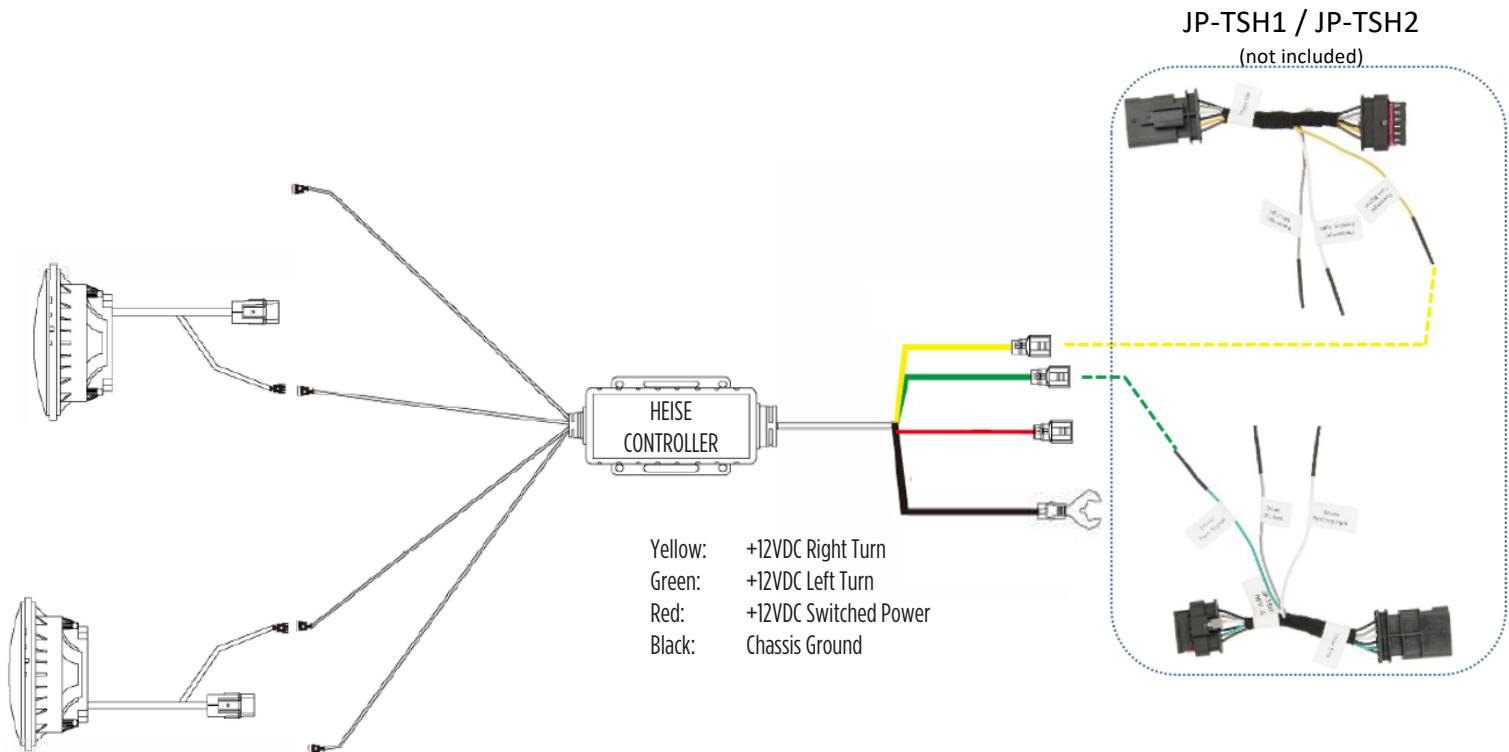



Thank you for purchasing your lighting from Metra Electronics! We're excited to see your installs, scan the QR to share on our Instagram. If you have any questions, comments, feedback on the product, please contact our tech support email via techsupport@metra-autosound.com.

Don't forget to Visit HEISELED.COM to view the available installation parts and Jeep accessories.

