



AXDI-6515

INSTALLATION INSTRUCTIONS



INTERFACE COMPONENTS

- AXDI-6515 Interface
- LD-AX-XSVI-FTI Harness

Data Interface

Fits Fiat 500 2012-2015

INTERFACE FEATURES

- Designed for non-amplified and amplified systems
- Provides accessory power (12-volt 10-amp)
- Retains R.A.P. (Retained Accessory Power)
- Provides NAV outputs (parking brake, reverse, speed sense)
- Pre-wired for Axxess SWC interface (sold separately)
- Retains factory 3.5mm AUX-IN & OE Bluetooth® connectivity
- High-level speaker input
- Micro “B” USB updatable

Product Info



TABLE OF CONTENTS

Connections LD-AX-XSVI-FTI.....	2
Installation	3
Programming.....	3


TOOLS & INSTALLATION ACCESSORIES REQUIRED

- Crimping tool and connectors, or solder gun, solder, and heat shrink
- Tape
- Wire cutter
- Zip ties
- Multimeter

Visit AxxessInterfaces.com
for more detailed information about the product
and up-to-date vehicle specific applications

ATTENTION: With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections, especially the air bag indicator lights, are plugged in before reconnecting the battery or cycling the ignition to test this product.
NOTE: Refer also to the instructions included with the aftermarket radio.

CONNECTIONS: LD-AX-XSVI-FT1

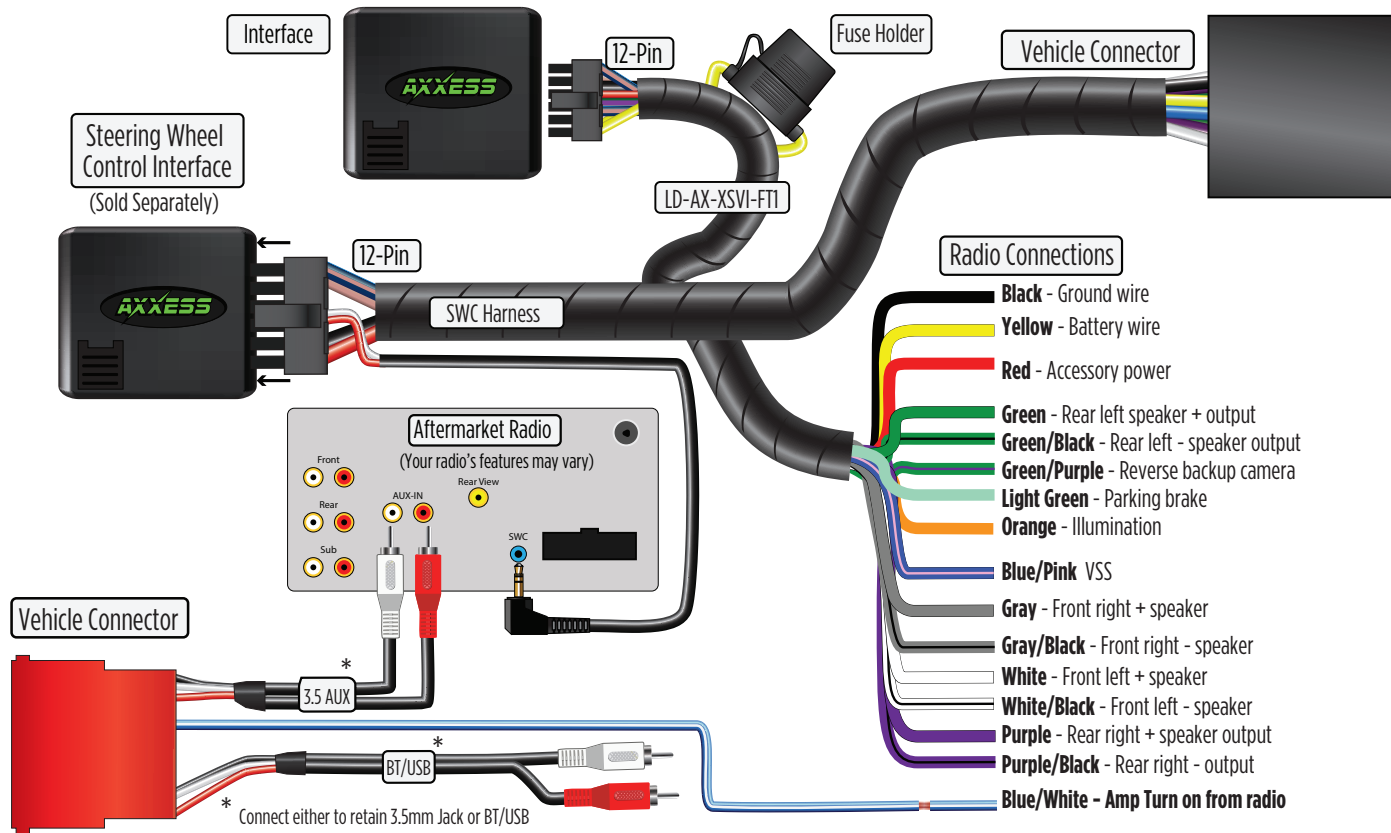

INSTALLATION

With the key in the off position:

- Connect the **AXDI-6515 harness** to **AXDI-6515 interface**, and then to the wiring harness in the vehicle.

Note: If using the Axxess SWC interface, connect it after you program and test the AXDI-6515, with the key in the off position.

PROGRAMMING

Attention! If the interface loses power for any reason, the following steps will need to be performed again.

- Turn the key (or push-to-start button) to the ignition position and wait until the radio comes on.

Note: If the radio does not come on within 60 seconds, turn the key to the off position, disconnect the interface, check all connections, reconnect the interface, and then try again.

- Turn the key to the off position, and then to the accessory position. Test the interface/radio for proper operation.



AXDI-6515

INSTALLATION INSTRUCTIONS

Having difficulties? We're here to help.



Contact our Tech Support line at:

386-257-1187



Or via email at:

techsupport@metra-autosound.com

Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 5:00 PM

Sunday: 10:00 AM - 4:00 PM



**Metra recommends MECP
certified technicians**