



AXRSCH-GMLN10

INSTALLATION INSTRUCTIONS



TOOLS REQUIRED

- Crimping tool and connectors, or solder gun, solder, and heat shrink
- Tape
- Wire cutter
- Zip ties
- Multimeter

For **Dash Disassembly Instructions**, refer to metraonline.com. Enter the year, make, and model of the vehicle in the **Vehicle Fit Guide** for **Radio Install kits**.

www.MetraOnline.com



Radio Status Control Harness

Fits Select GM Models **2016-2020**

Visit AxxessInterfaces.com for more detailed information about the product and up-to-date vehicle specific applications.

FEATURES

- AXRSC radio status control interface required (sold separately)
- Designed for non-amplified vehicles
- Provides accessory power (12-volt 10-amp)
- Retains R.A.P. (retained accessory power)
- Provides NAV outputs (parking brake, reverse, speed sense)
- Retains factory back up camera
- Allows visual of HVAC and gauges on aftermarket radio screen*(cannot be adjusted via the screen)
- Allows the retention and adjustment of the OE Personalization Settings
- Retains audio controls on the steering wheel
- Works in both Single and Dual-zone vehicles
- Retains safety chimes through an included off-board speaker
- Plug-n-play installation

*Designed for select aftermarket radios

NOTE: If retaining the amplified system AXM50-GM1 is needed (sold separately)

TABLE OF CONTENTS

| | |
|---------------------------|---|
| Connections..... | 2 |
| AXRSC Configuration | 3 |

COMPONENTS

- LD-GMLAN10-PIO
- LD-BACKUPCAM4T
- AXEXH-GM10
- LD-AX-SPK

WIRING & ANTENNA CONNECTIONS

Included with Kit: Wiring Harness

Sold separately: 40-EU55, GPS Antenna Adapter


NOTE: Universal radio harness included. There are many Plug-N-Play harnesses available. Please see Axxessinterface.com for more details.

ATTENTION: With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections are secure before cycling the ignition to test this product.

NOTE: Refer to the instructions included with the aftermarket radio.

AXXESS WIRING INSTALLATION


NON-AMPLIFIED

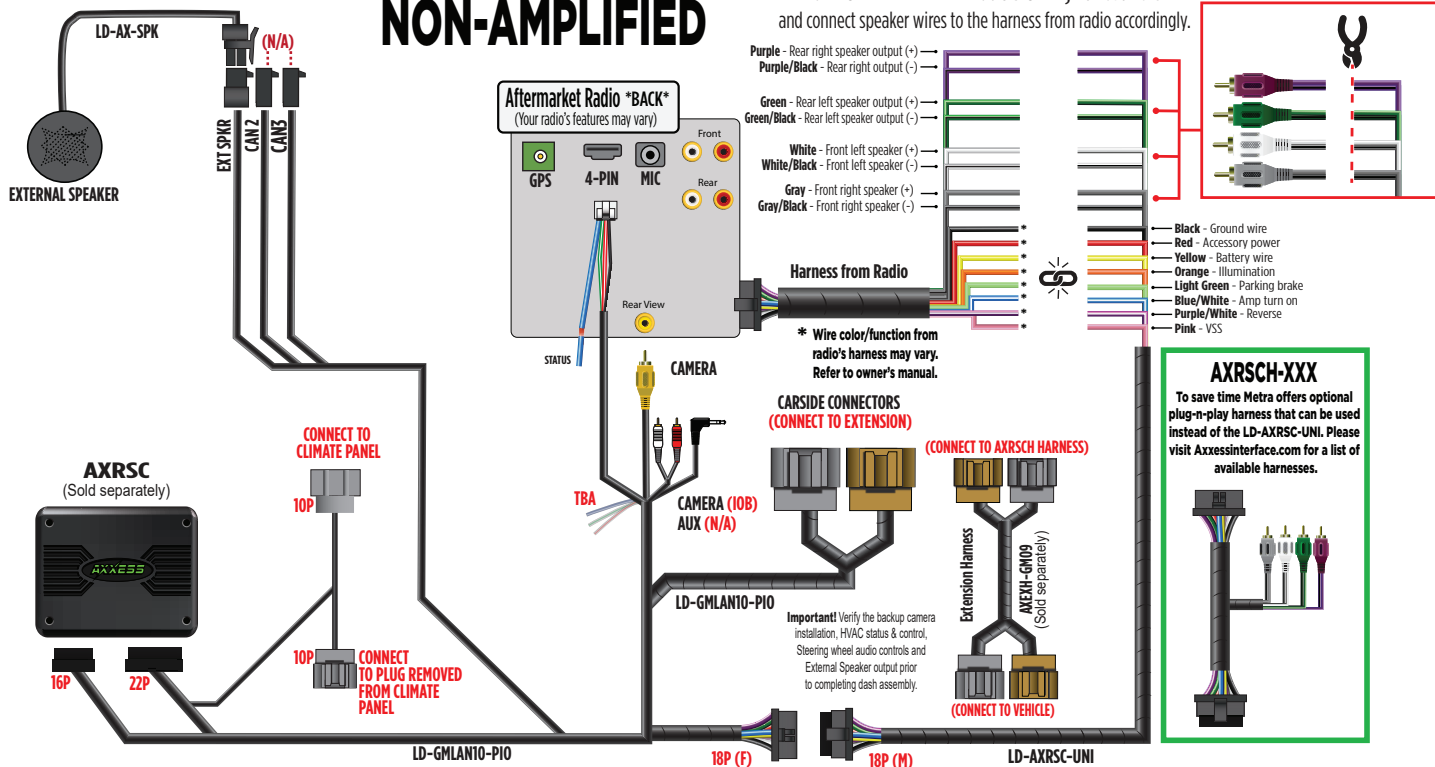

AXXESS UPDATER PROGRAM: AXRSC CONFIGURATION

AXRSC Configuration

1. Open the Axxess Updater program
2. Select **"AXRSC Config"**. (Figure A)
3. Enter **Year, Make, and Model** of vehicle you are working on. (Figure B)
4. Select **Radio Type**. (Figure B)

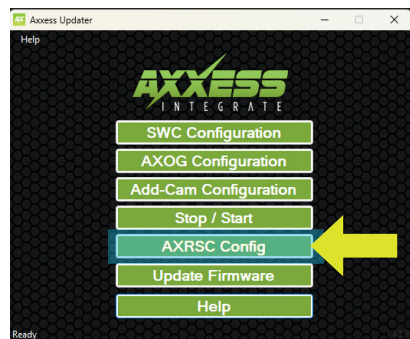

(Figure A)

5. Connect the **AXRSC** interface to your computer
6. Select **"Write Config"** (Figure B), and wait for confirmation of **"Configuration was written successfully"** to show on the screen. (Figure C)
7. Click **OK**, disconnect AXRSC interface and install in vehicle. (Figure C)

NOTE: Plugging in the interface and selecting **"Read Config"** will read what the **AXRSC interface** is programmed as.



(Figure B)

(Figure C)



AXRSCH-GMLN10

INSTALLATION INSTRUCTIONS



Having difficulties? We're here to help.



Contact our Tech Support line at:

386-257-1187



Or via email at:

techsupport@metra-autosound.com

Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 5:00 PM

Sunday: 10:00 AM - 4:00 PM



**Metra recommends MECP
certified technicians**