



## COMPONENTS

- LD-GMLAN09-PIO
- LD-GMSWC
- AXEXH-GM09
- LD-AX-SPK
- LD-BACKCAM-MOST

For **Dash Disassembly Instructions**, refer to [metraonline.com](http://metraonline.com). Enter the year, make, and model of the vehicle in the **Vehicle Fit Guide** for **Radio Install kits**.

[www.MetraOnline.com](http://www.MetraOnline.com)



## Radio Status Control Harness

### Fits Select GM Models 2014-2020

Visit [AxxessInterfaces.com](http://AxxessInterfaces.com) for more detailed information about the product and up-to-date vehicle specific applications.

## FEATURES

- AXRSC radio status control interface required (sold separately)
- Designed for non-amplified vehicles
- Designed for select aftermarket radios\*
- Provides accessory power (12-volt 10-amp)
- Retains R.A.P. (Retained Accessory Power)
- Retains factory backup camera
- Retains audio controls on the steering wheel
- Provides NAV outputs (parking brake, reverse, and speed sense)
- Allows visual of HVAC and gauges on aftermarket radio screen\* (cannot be adjusted via the screen)
- Allows the retention and adjustment of the OE personalization settings
- Works in both single and dual-zone vehicles
- Retains safety chimes through an included off-board speaker
- Plug-n-play installation

\*Features retained are dependent on the vehicle application.  
Refer to vehicle-specific instructions for details.

**NOTE:** If retaining the amplified system AXM50-GM1 is needed (sold separately)

## TABLE OF CONTENTS

Connections.....	2
AXRSC Configuration .....	3

## TOOLS REQUIRED

- Crimping tool and connectors, or solder gun, solder, and heat shrink
- Tape
- Wire cutter
- Zip ties
- Multimeter


**NOTE:** Universal radio harness included. There are many Plug-N-Play harnesses available. Please see [AxxessInterface.com](http://AxxessInterface.com) for more details.

**ATTENTION:** With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections are secure before cycling the ignition to test this product.

**NOTE:** Refer to the instructions included with the aftermarket radio.

# AXXESS WIRING INSTALLATION


## NON-AMPLIFIED

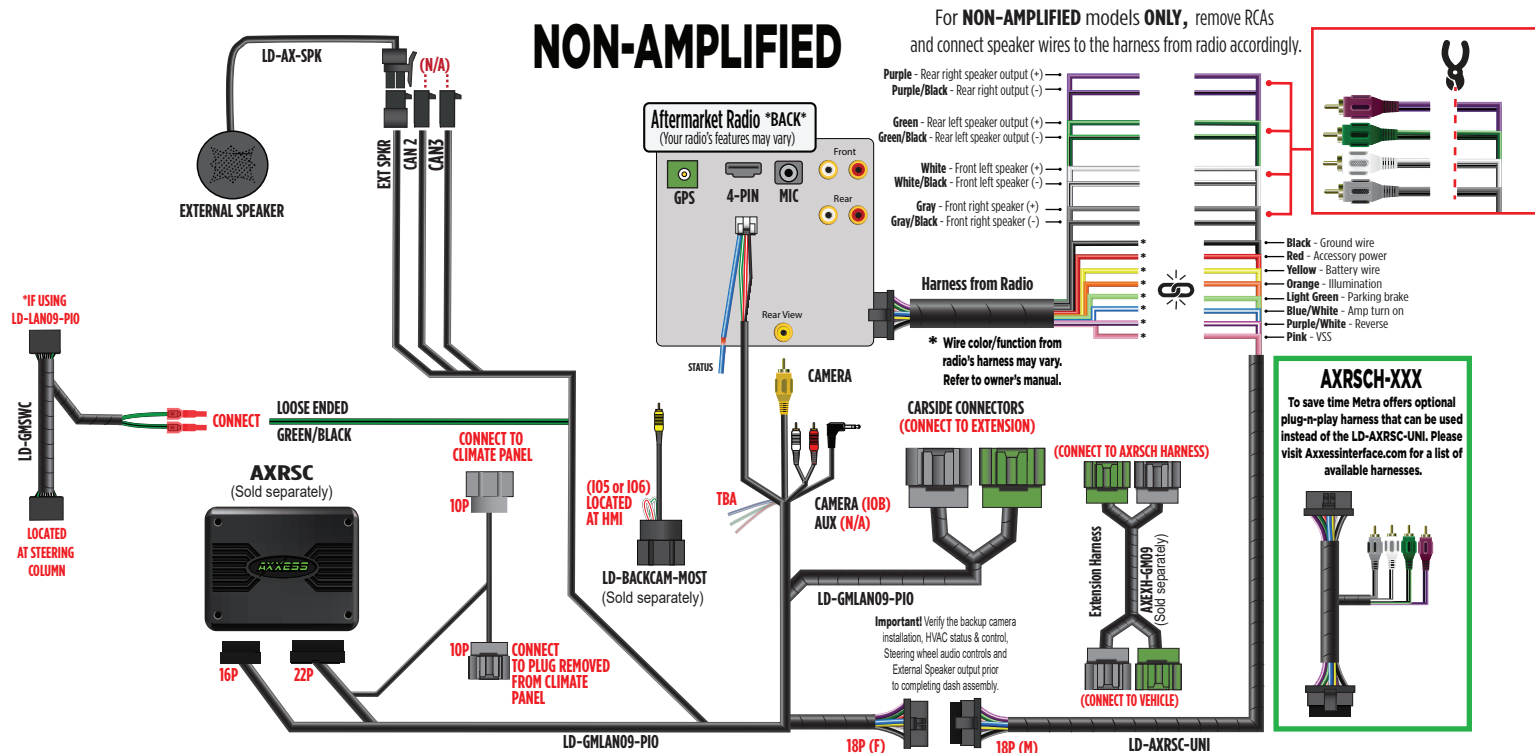

## AXXESS UPDATER PROGRAM: AXRSC CONFIGURATION

### AXRSC Configuration

1. Open the Axxess Updater program
2. Select **"AXRSC Config"**. (Figure A)
3. Enter **Year, Make, and Model** of vehicle you are working on. (Figure B)
4. Select **Radio Type**. (Figure B)

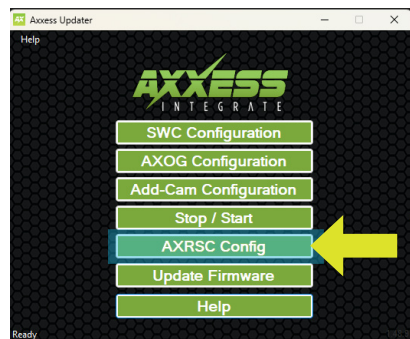

(Figure A)

5. Connect the **AXRSC** interface to your computer
6. Select **"Write Config"** (Figure B), and wait for confirmation of **"Configuration was written successfully"** to show on the screen. (Figure C)
7. Click **OK**, disconnect AXRSC interface and install in vehicle. (Figure C)

**NOTE:** Plugging in the interface and selecting **"Read Config"** will read what the **AXRSC interface** is programmed as.



(Figure B)

(Figure C)



# AXRSCH-GMLN9

INSTALLATION INSTRUCTIONS



Having difficulties? We're here to help.



Contact our Tech Support line at:

**386-257-1187**



Or via email at:

[techsupport@metra-autosound.com](mailto:techsupport@metra-autosound.com)

## Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 5:00 PM

Sunday: 10:00 AM - 4:00 PM



**Metra recommends MECP  
certified technicians**