


SUBWOOFER ENCLOSURE WIRING GUIDE




THE ENCLOSURE IS FITTED WITH A DUAL 2Ω SUBWOOFER. IT CAN BE CONFIGURED FOR EITHER 4Ω OR 1Ω IMPEDANCE AT THE AMPLIFIER.

SERIES (4Ω IMPEDANCE)

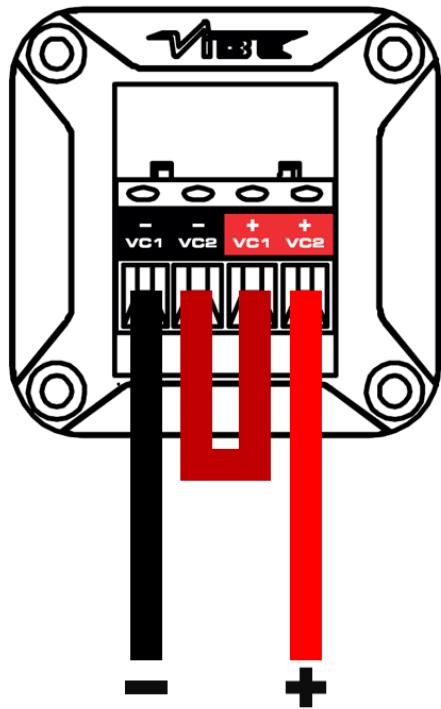

PARALLEL (1Ω IMPEDANCE)

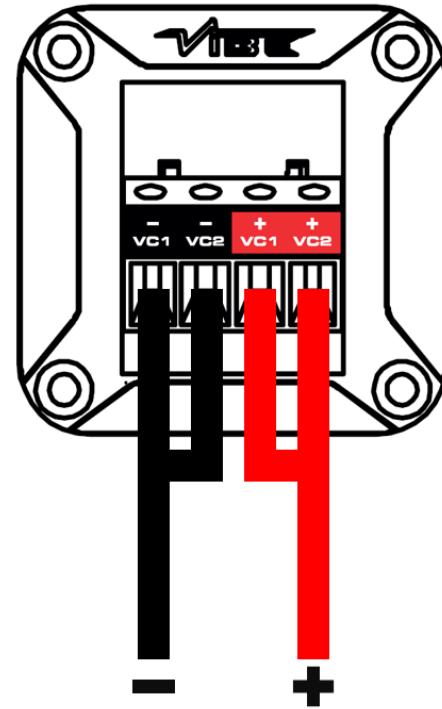

TO AVOID DAMAGE TO YOUR SUBWOOFER OR AMPLIFIER, CONSULT YOUR AMPLIFIER OWNERS MANUAL FOR THE RATED OUTPUT AND IMPEDANCE.