



6 Gang switch panel

3 zones, 6 fused outputs

Visit [HeiseLED.com](https://www.HeiseLED.com) to view the available other Heise vehicle accessories.

KIT INFORMATION

- 3 Fused zones
- Painted aluminum base
- DEUTSCH trigger connection lead
- Polycarbonate smoked cover
- Blown fuse indicator
- Spare fuses and fuse puller

WHAT'S IN THE BOX

- #2 Philips mount screws
- 6 gang switch panel
- (3) 30A, (3) 20A, (3) 15A fuses
- DEUTSCH trigger with 6 leads

Having difficulties?

Contact our tech support line at:
Techsupport@metra-autosound.com

Or via phone
at: 386.257.1187

TECH SUPPORT HOURS (EST)

Monday-Friday: 9:00AM – 7:00PM
Saturday: 10:00AM – 5:00PM
Sunday: 10:00AM – 4:00PM

Closed for most US Federal Holidays

Power Connections:

GND - Connect the ground lug to chassis ground.

+12V - Connect the 12 Volt lug to the vehicle battery. Recommended 130 amp in line fuse.

VCC - Connect the REM IN wire to ignition, battery or some switched 12V DC wire to control on/off



Connections:

Channels 1 and 2 can handle 15 amps each

Channels 3 and 4 can handle 20 amps each

Channels 5 and 6 can handle 30 amps each

NOTE: The control box requires that the accessories + and - wires be connected to the control box, not to chassis ground. Doing so can result in equipment failure.

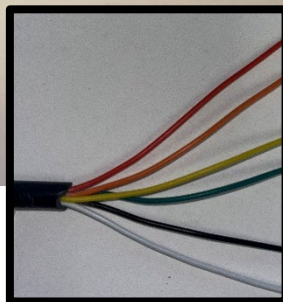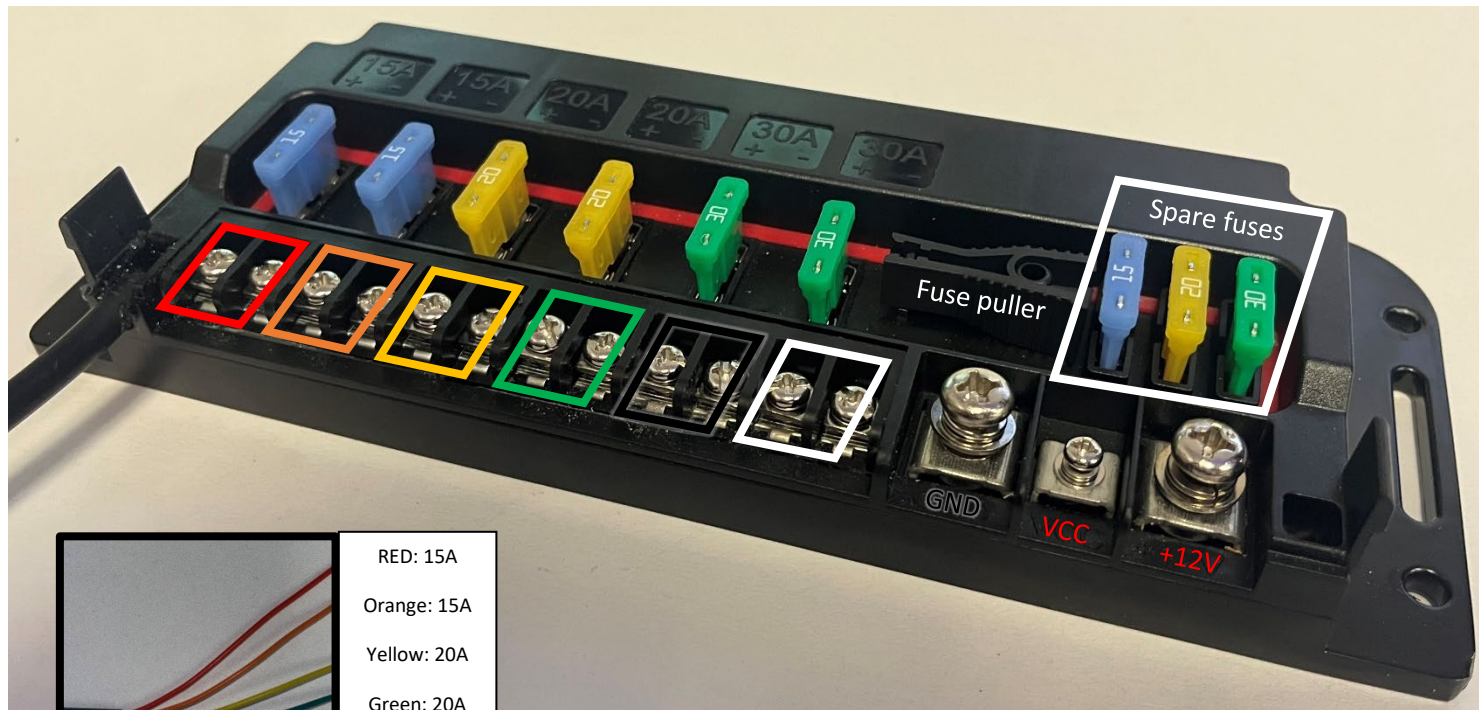

RED: 15A
Orange: 15A
Yellow: 20A
Green: 20A
Black: 30A
White: 30A

Triggers: Ground triggers, designed for latching switches

Blown fuse indicator:

When the red LED is on, the fuse is missing or blown for that circuit

**Mounting:**

Using the supplied #2 Phillips screws to mount the switch panel

NOTE: The slots can be used with cable ties for cable management

