


UNIVERSAL APPLICATION

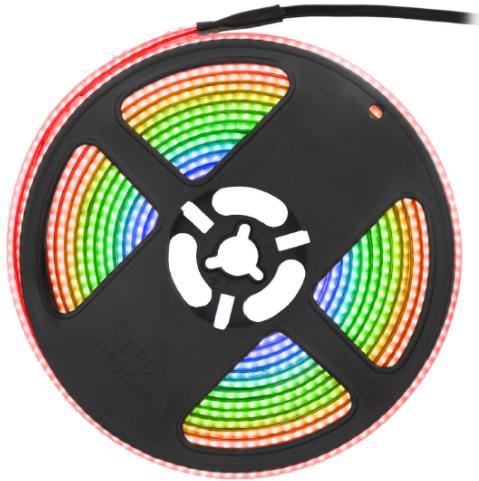

Visit HEISELED.COM to view the available installation parts and accessories.

KIT FEATURES

- 5 meter reel of Chasing COB LED strip lights
- Heise Connect Chasing Controller included
- RF remote included
- IP65 rated strip light
- 1-year limited warranty

Tools needed

- Alcohol wipes
- Digital multimeter
- Soldering iron
- Solder
- Wire strippers
- Electrical tape
- Tape measure

Having difficulties?

Contact our tech support line at:
Techsupport@metra-autosound.com

Or via phone at:
388.257.1187

TECH SUPPORT HOURS (EST)

Monday - Friday: 9:00AM - 7:00PM
Saturday: 10:00AM - 5:00PM
Sunday: 10:00AM - 4:00PM

Closed for most US Federal Holidays

Installation instructions

1. Measure the length of desired mounting location for LED strip.
2. Roll out a LED strip to the same length. Cut the LED strip across the nearest cut line. (Fig A)
3. Clean the mounting location with an alcohol wipe and let full dry.
4. Remove the protective backing from the LED strip (Fig B), then press the strip into place. Apply pressure for **30** seconds.
5. Mount the controller and connect RED wire to switched **+12V**, and BLACK wire to chassis ground. (Fig C)
6. Connect the trigger wires (optional) (Fig D)
7. Connect strip to controller.
8. Download app and set the chase pixel count.
9. Test functionality with remote and app.

Fig A



Fig B

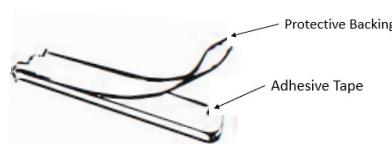


Fig C



Fig D



Second Strip

The remaining strip can be used by soldering an adapter from the HE-CHASE-4PT (not included) to the **3** contact pads. (Fig E) Make sure to solder to the start of the strip. The strip direction is indicated by the arrow printed on the strip. (Fig F)

